

AQUAPave[®]

Permeable On-Site Stormwater
Source Control System

VENETIAN COBBLE


AQUAPave[®]

A Paving System
We Can All Live With[®]



ABBOTSFORD
CONCRETE PRODUCTS



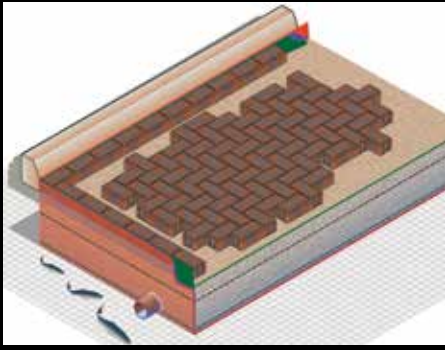

Installation Guide:

1. Compact and level the sub-base.
2. Place the AP SC1000 woven geotext tile with the specified overlap.
3. Place and spread the clear crushed open-graded lower Sub-base aggregate without wrinkling or folding the geotextile.
4. Compact the lower Sub-base.
5. Place and spread the clear crushed open-graded upper Sub-base.
6. Compact the clear crushed open-graded upper Sub-base.
7. Place the Inbitex® geotextile.
8. Place and spread the 5mm clear crush bedding material.
9. Compact the 5mm clear crushed open-graded bedding material.
10. Loose screed the 5mm clear crush open-graded Bedding Course.
11. Place the AquaPave® pavers.
12. Compact the AquaPave® pavers.
13. Spread and sweep in the AP Engineered Joint Stabilizer.
14. Compact the AquaPave® pavers.

Specifications:

ABBOTSFORD CONCRETE PRODUCTS

Pavers are manufactured to ASTM C 936 and CSA A231.2-14 specifications.

HydraPressed Slabs to CSA A231.1-14 and ASTM C1782/C1782M-16 specifications.

Concrete strength: 8000 PSI (55 MPA)

Absorption: shall not exceed 5%

Weight: 2-³/₈" (60mm): approx. 28lbs/ft² (140kg/m²)
3-¹/₈" (80mm): approx. 37lbs/ft² (182kg/m²)

Visit our website at

www.pavingstones.com

for our complete product guide,
color selection, design details
and photo gallery,
or call toll free 1-800-663-4091.


The Venetian Cobble Series is one of our most innovative accomplishments to date. Venetian Cobble has the aesthetic appearance of natural cut stone, enhancing the Large Format design motif, while softening the lineal appearance by combining five interrelated shapes.

With our next generation AquaPave System, the Venetian Cobble Series is the first to incorporate our unique spacer bar design. This allows the Venetian Cobble Series to also be installed in sand set applications.



Sealed pavers in this brochure have received an acrylic sealer, which is recommended to help with maintenance and to protect them against staining. Sealing is done post installation.

*For best results, pavers should be installed from several pallets to ensure color consistency, especially with multi-color blends.

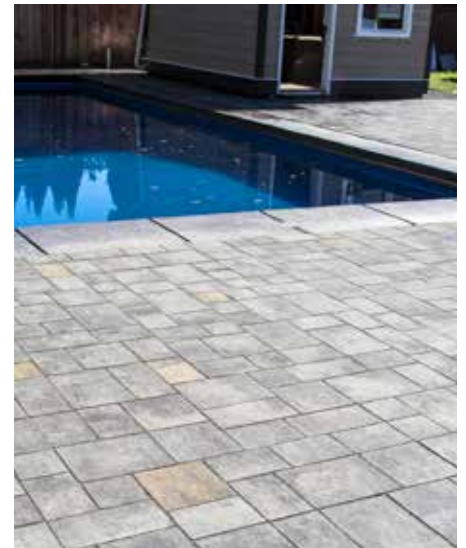

Type 1

228mm x 304mm x 90mm
9" x 12" x 3-9/16"



Type 2

152mm x 304mm x 90mm
6" x 12" x 3-9/16"



Type 3

228 mm x 228mm x 90mm
9" x 9" x 3-9/16"



Type 4

152mm x 228mm x 90mm
6" x 9" x 3-9/16"



Type 5

152mm x 152mm x 90mm
6" x 6" x 3-9/16"

The Venetian Cobble Series comes from the factory in this repeating random pattern that is suitable for machine laying. Machine layable pavers increase efficiency and lowers labor costs.

