

Classic Standard Series with Face Mix




Where function meets style





Our Classic Standard Series is the ultimate in adaptive design! Pattern selections range from a traditional cobblestone to sleek, contemporary style that demands attention.

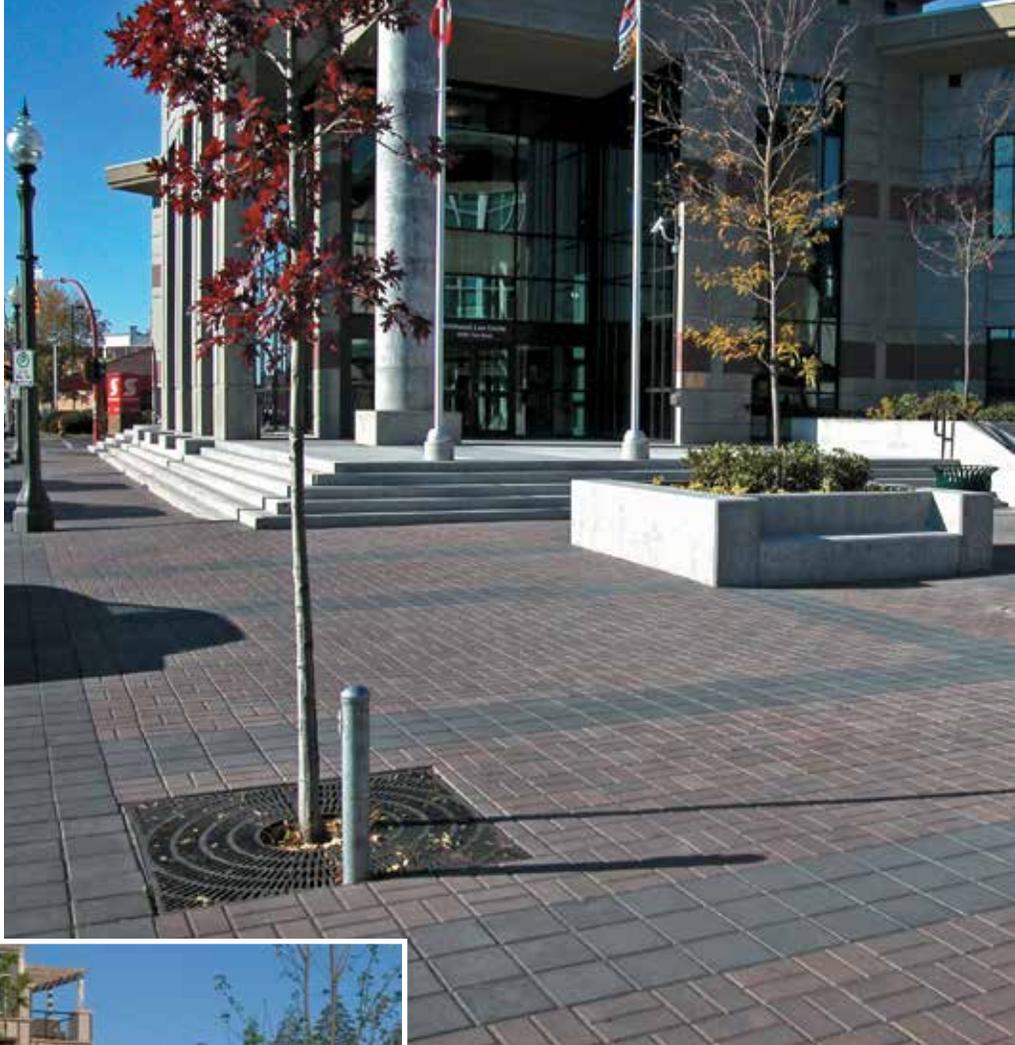

*Our pavers are made with the unique **Face Mix** two layer process. In this process, the wearing surface of the paver is composed of uniformly graded hard, sharp granite aggregate, high cement content and a correspondingly high pigment content. This results in a dense high strength surface, more intense color stability and greater abrasion resistance than traditional paving stones. The balance of the paver is composed of high strength compressed concrete.*



Natural*



Shadow* Blend




Red*




Red/Black* Blend




Desert Sand* Blend

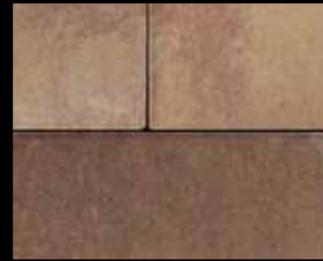


Sand/Brown* Blend

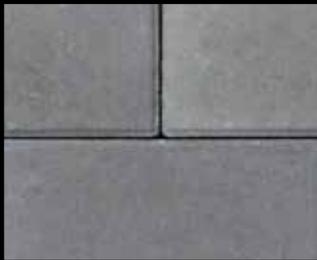

Charcoal*

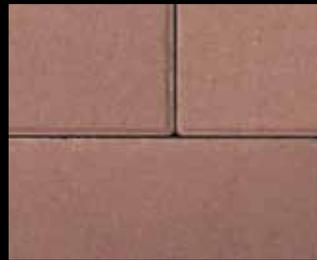

Brown* special order

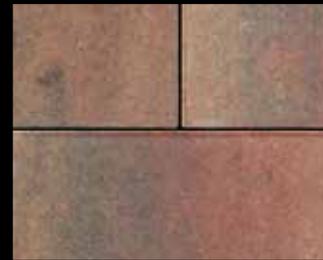

Indian Summer* Blend


California and Nevada available in limited stock colors.

**For best results, pavers should be installed from several pallets to ensure color consistency, especially with multi-color blends.*


While the colors shown here are represented as accurately as possible, they should only be used as a guide. Actual samples should be viewed before making a final color selection.

At Abbotsford Concrete, custom colors can be special ordered to help you make a design statement for that unique project.

Available in a wide range of colors, shapes and patterns, the Classic Standard Series provides you with a variety of possibilities, limited only by your imagination to create the right look.

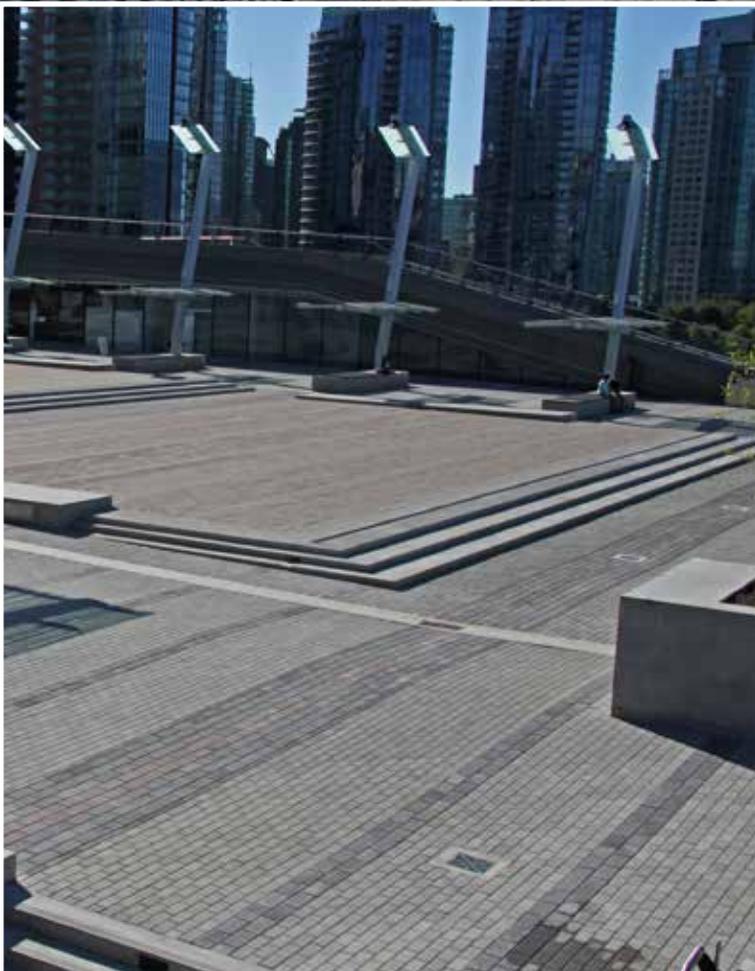


Visit our website at
www.pavingstones.com
for our complete product guide,
design details and photo gallery.

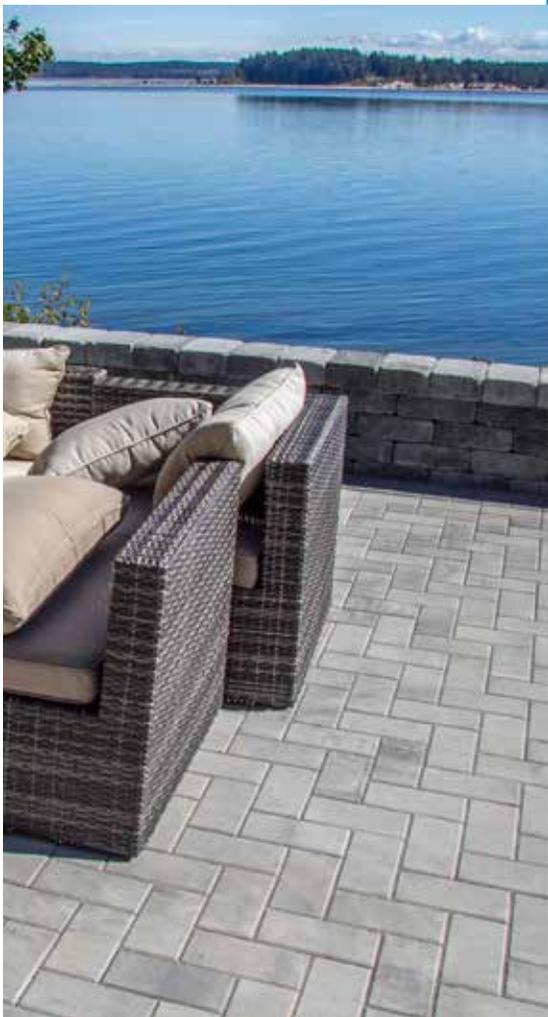


The **Standard Series** is the ultimate in adaptive design. The six sizes and large selection of colors can be used in a wide variety of patterns to reflect your personal style, from understated to dramatic.



*1999 Interlocking Paver Award Winner:
City Hall Revitalization Project
- Oakland, California.*

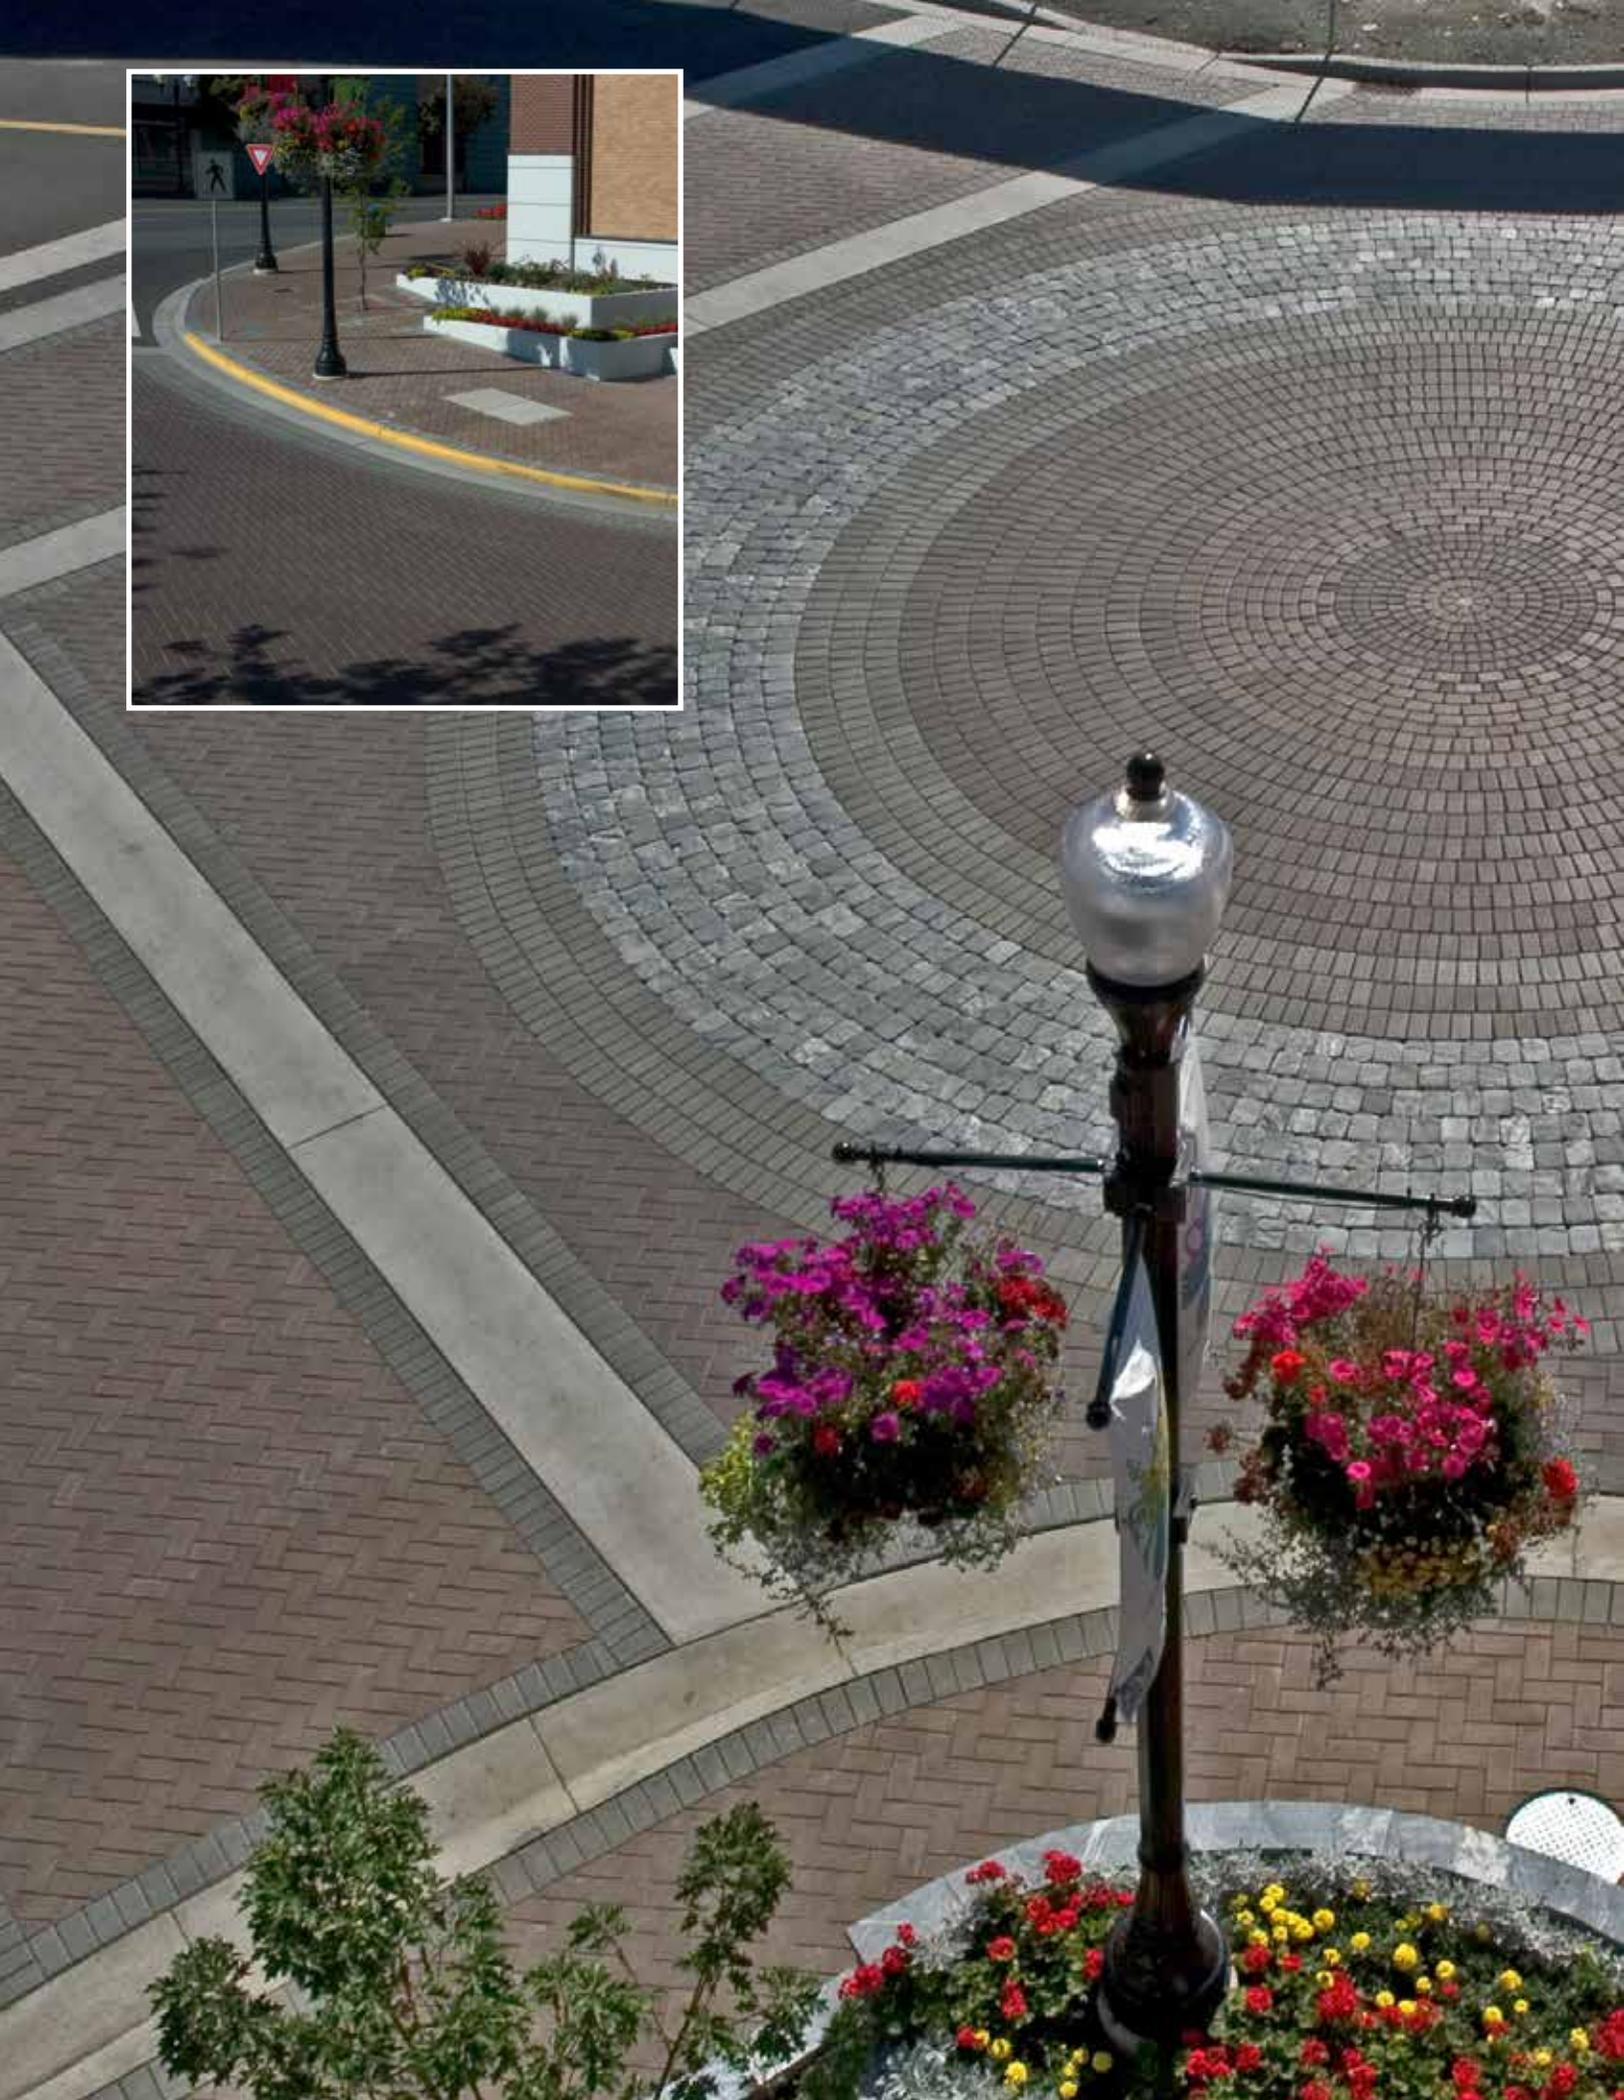

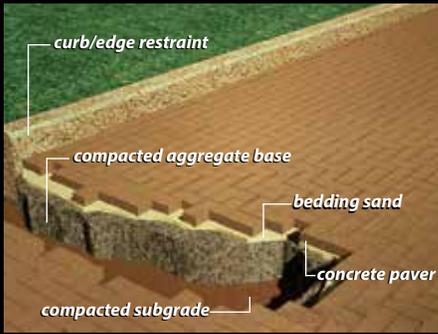

How to get a professional look.

1. Compact and level the sub-base.
2. Backfill with 4" to 10" (50-250mm) of 3/4" minus road mulch or equivalent compacted granular fill.
3. Spread 1" (25mm) of concrete sand over fill. Avoid walking on the prepared base as this may cause the finished surface to be uneven.
4. Place Classic Standard Series pavers in the desired pattern close together. The spacing should be consistent to help maintain a uniform pattern. Pavers can be cut to fit with a paver cutter or masonry saw.
5. Tamp down pavers with a mechanical vibrator until level and firmly in place.
6. Fill joints completely by sweeping Abbotsford Concrete's joint sand across the surface, then compacting until joints are completely filled. The area is now ready for immediate use.

Specifications:

ABBOTSFORD CONCRETE PRODUCTS

Pavers are manufactured to ASTM C936/C936M-18 and CSA A231.2-19 specifications.


HydraPressed Slabs to ASTM C1782/C1782M-19 and CSA A231.1-19 specifications.

Concrete strength: 8000 PSI (55 MPA)

Absorption: shall not exceed 5%

Weight: 2- 3/8" (60mm): approx. 28lbs/ft² (140kg/m²)
3- 1/8" (80mm): approx. 37lbs/ft² (182kg/m²)


Sizes and Specifications



Half Standard

Half Standard

Length: 4 7/16" (112.5mm)
Width: 4 7/16" (112.5mm)
Area: 7.3 stones /ft²
78.5 stones /m²
Thickness: 2 3/8" (60mm)

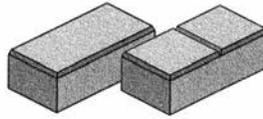


Standard & Standard II

Standard & Standard II

Length: 8 7/8" (225mm)
Width: 4 7/16" (112.5mm)
Area: 3.7 stones /ft²
40 stones /m²
Thickness: 2 3/8" (60mm)
3 1/8" (80mm)

Standard II is a special order




Double Standard

Double Standard

Length: 8 7/8" (225mm)
Width: 8 7/8" (225mm)
Area: 1.8 stones /ft²
20 stones /m²
Thickness: 2 3/8" (60mm)

3-1/8" (80mm) special order




3:1 Standard

3:1 Standard

Length: 8 7/8" (225mm)
Width: 2 15/16" (75mm)
Area: 5.4 stones /ft²
60 stones /m²
Thickness: 2 3/8" (60mm)

Special Order

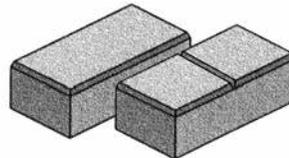


California & California II

California I & California II


Length: 11 7/8" (301mm)
Width: 5 15/16" (151mm)
Area: 2 stones /ft²
21.4 stones /m²
Thickness: 2 3/8" (60mm)
3 1/8" (80mm)
3 15/16" (100mm)

California I in 80mm and 100mm, all California II in 60mm and 80mm are Special Order.



Nevada

Length: 11 7/8" (301mm)
Width: 11 7/8" (301mm)
Area: 1 stones /ft²
7.4 stones /m²
Thickness: 2 3/8" (60mm)

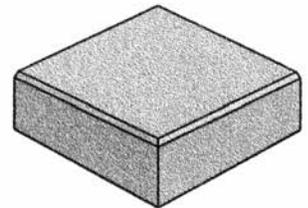

Sierra

Length: 15 3/4" (401mm)
Width: 15 3/4" (401mm)
Area: .6 stones /ft²
6.2 stones /m²
Thickness: 3 1/8" (80mm)

Special Order

Visit our website at

www.pavingstones.com

for our complete product guide,
design details and photo gallery.
or call toll free 1-800-663-4091

