

# Old Country Stone



*Where function meets style*



**ABBOTSFORD**  
CONCRETE PRODUCTS

**Oldcastle APG**  
A CRH COMPANY



*Today's technology can transport European charm of the past right to your doorstep. Old Country Stone is a tumbled product that gives the aesthetics of a hand-hewn stone with the convenience and practicality of a paver.*








A "Natural" choice, **Old Country Stone** is tumbled to give a hand hewn character. A perfect combination of elegance & charm.

Old Country Stone is the perfect choice for reflecting the incredible possibilities when old world charm meets the present.

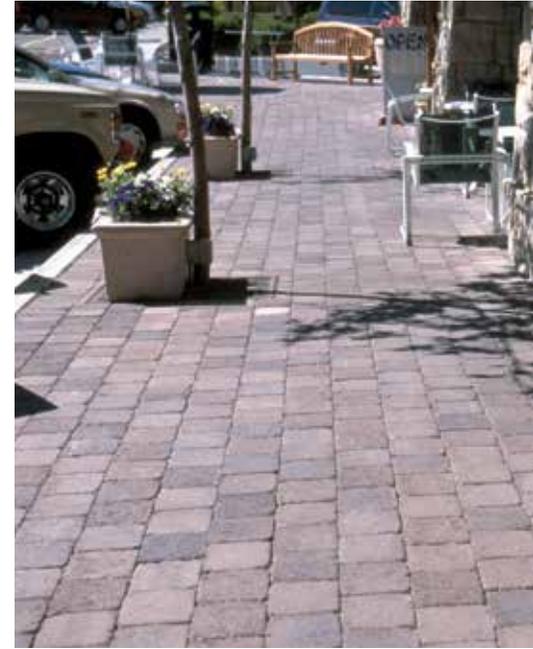

## How to get a professional look.

1. Compact and level the sub-base.
2. Backfill with 4" to 10" (100-250mm) of 3/4" minus road mulch or equivalent compacted granular fill.
3. Spread 1" (25mm) of concrete sand over fill. Avoid walking on the prepared base as this may cause the finished surface to be uneven.
4. Place Old Country Stone pavers in the desired pattern close together. The spacing should be consistent to help maintain a uniform pattern. Pavers can be cut to fit with a paver cutter or masonry saw.
5. Compact pavers with a mechanical plate compactor until level and firmly in place.
6. Fill joints completely by sweeping Abbotsford Concrete's joint sand across the surface, then compacting until joints are completely filled. The area is now ready for immediate use.



### Type 1

Length: 8<sup>7</sup>/<sub>8</sub>" (226mm)  
 Width: 7<sup>1</sup>/<sub>8</sub>" (181mm)  
 Area: 2.3 stones/ft<sup>2</sup>  
 25 stones/m<sup>2</sup>  
 Thickness: 2<sup>3</sup>/<sub>8</sub>" (60mm)



### Type 2

Length: 5<sup>15</sup>/<sub>16</sub>" (151mm)  
 Width: 7<sup>1</sup>/<sub>8</sub>" (181mm)  
 Area: 3.4 stones/ft<sup>2</sup>  
 37 stones/m<sup>2</sup>  
 Thickness: 2<sup>3</sup>/<sub>8</sub>" (60mm)



### Type 3

Length: 3" (76mm)  
 Width: 7<sup>1</sup>/<sub>8</sub>" (181mm)  
 Area: 6.8 stones/ft<sup>2</sup>  
 74 stones/m<sup>2</sup>  
 Thickness: 2<sup>3</sup>/<sub>8</sub>" (60mm)



Charcoal\*



Desert Sand\* Blend



Natural\*



Tan/Brown\* Blend



Walnut\* Blend



Red/Black\* Blend



Shadow\* Blend



Taupe\* Blend



La Jolla\* Blend

## Specifications:

### ABBOTSFORD CONCRETE PRODUCTS

Pavers are manufactured to ASTM C936/C936M-18 and CSA A231.2-19 specifications.

HydraPressed Slabs to ASTM C1782/C1782M-19 and CSA A231.1-19 specifications.

**Concrete strength:** 8000 PSI (55 MPA)

**Absorption:** shall not exceed 5%

**Weight:** 2- 3<sup>3</sup>/<sub>8</sub>" (60mm): approx. 28lbs/ft<sup>2</sup> (140kg/m<sup>2</sup>)  
 3- 1<sup>1</sup>/<sub>8</sub>" (80mm): approx. 37lbs/ft<sup>2</sup> (182kg/m<sup>2</sup>)

Visit our website at

[www.pavingstones.com](http://www.pavingstones.com)

for our complete product guide,  
 color selection, design details  
 and photo gallery,  
 or call toll free 1-800-663-4091.

While the colors shown here are represented as accurately as possible, they should only be used as a guide. Actual samples should be viewed before making a final color selection.

\*For best results, pavers should be installed from several pallets to ensure color consistency, especially with multi-color blends.

