


# Universal



*Where function meets style*




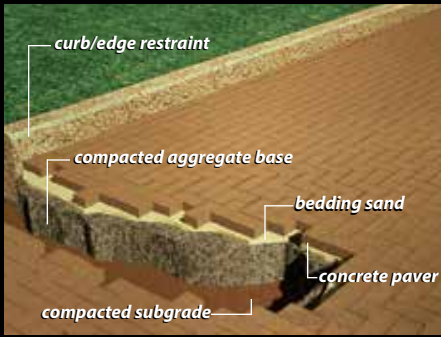

**Universal** is an eye-pleasing interlocking paving stone, ideal for that high traffic area. The unique jig-saw shape can be placed in a variety of patterns from an informal herring-bone to a classic parquet design.



**Full Stone**  
 Length: 8-7/8" (225mm)  
 Width: 4-7/16" (112.5mm)  
 Thickness: 2-3/8" (60mm)  
 Area: 3.7 stones / ft<sup>2</sup>  
 40 stones / m<sup>2</sup>



**Full Edge**  
 Length: 8-7/8" (225mm)  
 Width: 4-7/16" (112.5mm)  
 Thickness: 2-3/8" (60mm)  
 Area: 3.7 stones / ft<sup>2</sup>  
 40 stones / m<sup>2</sup>



**Half Edge**  
 Length: 4-7/16" (112.5mm)  
 Width: 4-7/16" (112.5mm)  
 Thickness: 2-3/8" (60mm)  
 Area: 7.3 stones / ft<sup>2</sup>  
 80 stones / m<sup>2</sup>

## How to get a professional look.

1. Compact and level the sub-base.
2. Backfill with 4" to 10" (100-250mm) of 3/4" minus road mulch or equivalent compacted granular fill.
3. Spread 1" (25mm) of concrete sand over fill. Avoid walking on the prepared base as this may cause the finished surface to be uneven.
4. Place Universal pavers in the desired pattern close together. The spacing should be consistent to help maintain a uniform pattern. Pavers can be cut to fit with a paver cutter or masonry saw.
5. Compact pavers with a mechanical plate compactor until level and firmly in place.
6. Fill joints completely by sweeping Abbotsford Concrete's joint sand across the surface, then compacting until joints are completely filled. The area is now ready for immediate use.

Our pavers are made with the unique **PermaFinish** two layer process. In this process, the wearing surface of the paver is composed of uniformly graded hard, sharp granite aggregate, high cement content and a correspondingly high pigment content.

This results in a dense high strength surface, more intense color stability and greater abrasion resistance than traditional paving stones. The balance of the paver is composed of high strength compressed concrete.




### Specifications:


#### ABBOTSFORD CONCRETE PRODUCTS

Pavers are manufactured to ASTM C 936 and CSA A231.2-14 specifications,

**Concrete strength:** 8000 PSI (55 MPA)  
**Absorption:** shall not exceed 5%  
**Weight:** 2-3/8" (60mm): approx. 28lbs/ft<sup>2</sup> (140kg/m<sup>2</sup>)  
 3-1/8" (80mm): approx. 37lbs/ft<sup>2</sup> (182kg/m<sup>2</sup>)



Red unsealed



Red sealed\*

\* "Sealed" pavers in this brochure have received an acrylic sealer, which is recommended to help with maintenance and to protect them against staining. Sealing is done post installation.

Visit our website at

[www.pavingstones.com](http://www.pavingstones.com)

for our complete product guide,  
 color selection, design details  
 and photo gallery,  
 or call toll free 1-800-663-4091.



**ABBOTSFORD**  
 CONCRETE PRODUCTS

**Oldcastle APG**  
 A CRH COMPANY