


Metropolitan Series with Face Mix



Where function meets style



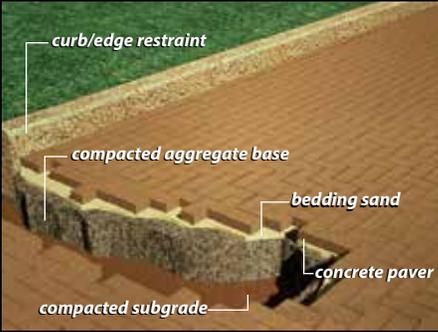

How to get a professional look.

1. Compact and level the sub-base.
2. Backfill with 4" to 10" (50-250mm) of 3/4" minus road mulch or equivalent compacted granular fill.
3. Spread 1" (25mm) of concrete sand over fill. Avoid walking on the prepared base as this may cause the finished surface to be uneven.
4. Place Metropolitan pavers in the desired pattern close together. The spacing should be consistent to help maintain a uniform pattern. Pavers can be cut to fit with a paver cutter or masonry saw.
5. Tamp down pavers with a mechanical vibrator until level and firmly in place.
6. Fill joints completely by sweeping Abbotsford Concrete's joint sand across the surface, then compacting until joints are completely filled. The area is now ready for immediate use.

Specifications:


ABBOTSFORD CONCRETE PRODUCTS

Pavers are manufactured to ASTM C936/C936M-18 and CSA A231.2-19 specifications.

HydraPressed Slabs to ASTM C1782/C1782M-19 and CSA A231.1-19 specifications.

Concrete strength: 8000 PSI (55 MPA)
Absorption: shall not exceed 5%
Weight: 2- 3/8" (60mm): approx. 28lbs/ft² (140kg/m²)
 3- 1/8" (80mm): approx. 37lbs/ft² (182kg/m²)

Our Metropolitan Series is a contemporary Large Format paver designed for areas such as plazas, parking lots and low speed roads.



Type 1
 400mm x 200mm x 100mm
 15-3/4" x 7-7/8" x 3-15/16"



Type 2
 200mm x 200mm x 100mm
 7-7/8" x 7-7/8" x 3-15/16"





Type 3
 200mm x 100mm x 100mm
 7-7/8" x 3-15/16" x 3-15/16"

Please call 1.800.663.4091 for color availability.



The Metropolitan Series can also be installed in conjunction with the 10cm California and with the Piazza Series (pedestrian applications only) to extend your pattern possibilities.

The Metropolitan Series comes from the factory in this repeating random pattern that is suitable for machine laying. Machine layable pavers increase efficiency and lowers labor costs.



Visit our website at

www.pavingstones.com

for our complete product guide, color selection, design details and photo gallery, or call toll free 1-800-663-4091.

